


# TAYLORMADE STUDWELDING MANUAL FEED PRODUCTION WELD HEADS

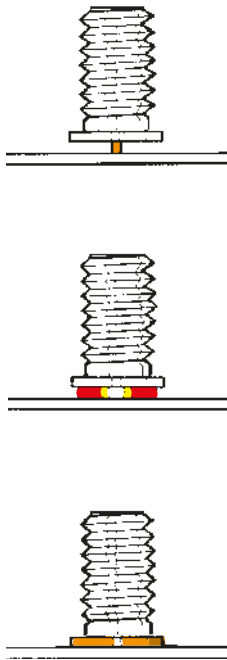

Taylor Studwelding Systems Limited is a specialist in the design, manufacture and supply of Studwelding equipment and studs. Within our range of British built equipment we will have the system to suit your requirements.

## MANUAL FEED PRODUCTION WELD HEADS FOR CAPACITOR DISCHARGE AND DRAWN ARC SHORT CYCLE STUDWELDING

Designed and built to meet all required standards. The Taylor Studwelding Manual Feed Production Weld Head Systems are CE and UKCA marked.

TEL: +44 (0)1924 452123 | FAX: +44 (0)1924 430059  
EMAIL: [sales@taylor-studwelding.com](mailto:sales@taylor-studwelding.com) | [www.taylor-studwelding.com](http://www.taylor-studwelding.com)



A TAYLORMADE STUDWELDING PRODUCTION WELD HEAD TO WELD UP TO 10MM DIAMETER STUDS

TAYLOR STUDWELDING SYSTEMS LIMITED

Commercial Road, Dewsbury, West Yorkshire, WF13 2BD, England

TEL: +44 (0)1924 452123 | FAX: +44 (0)1924 430059 | EMAIL: [sales@taylor-studwelding.com](mailto:sales@taylor-studwelding.com)

[www.taylor-studwelding.com](http://www.taylor-studwelding.com)

# TAYLORMADE STUDWELDING SYSTEMS WELD HEADS FOR MANUAL FEED



CD-C2

## CAPACITOR DISCHARGE CONTACT WELD HEAD MANUAL FEED TYPE CD-C2

- Robust design – light and strong.
- Made from BAH – Delrin.
- Easily adjustable return speed.
- Visual indication of speed setting.
- Welding range 2mm to 10mm diameter.
- Stud Length range – Standard up to 35mm – Extended any length
- Part number: 99-100-042.
- Dimensions (L x W x H) (mm): 200 x 85 x 50.
- Weight: 1kg.



CD-LG2

## CAPACITOR DISCHARGE LIFT GAP WELD HEAD MANUAL FEED TYPE CD-LG2

- Robust design – light and strong.
- Made from BAH – Delrin.
- Easily adjustable lift height.
- Visual indication of lift height.
- Welding range 2mm to 10mm diameter.
- Stud Length range – Standard up to 35mm – Extended any length
- Part number: 99-100-044.
- Dimensions (L x W x H) (mm): 200 x 85 x 50.
- Weight: 1kg.



DA8-A

## DRAWN ARC SHORT CYCLE WELD HEAD MANUAL FEED TYPE DA8-A

- Robust design – light and strong.
- Made from BAH – Delrin.
- Easily adjustable lift height.
- Visual indication of lift height.
- Welding range 2mm to 10mm diameter.
- Stud Length range – Standard up to 35mm – Extended any length
- Part Number: 99-101-037.
- Dimensions (L x W x H) (mm): 200 x 85 x 50.
- Weight: 1kg.

## CABLES

- Set of cables up to 5 meters long complete with footswitch to suit weld heads above.
- Part number: 99-101-401.

## FOR TROUBLE FREE WELDING YOU WILL STILL NEED TO PURCHASE TOP QUALITY WELD STUDS

- We stock and sell a full range of Mild Steel, Stainless Steel, Aluminium Alloy and Brass from M2.5 to M10, with all Capacitor Discharge studs manufactured to European and international standards for automatic welding.
- With over 10,000,000 items held in stock, no order is too complex to fulfil.



TAYLOR STUDWELDING SYSTEMS LIMITED

Commercial Road, Dewsbury, West Yorkshire, WF13 2BD, England

TEL: +44 (0)1924 452123 | FAX: +44 (0)1924 430059 | EMAIL: sales@taylor-studwelding.com

[www.taylor-studwelding.com](http://www.taylor-studwelding.com)