


TAYLORMADE AUTOMATIC STUDWELDING SYSTEMS

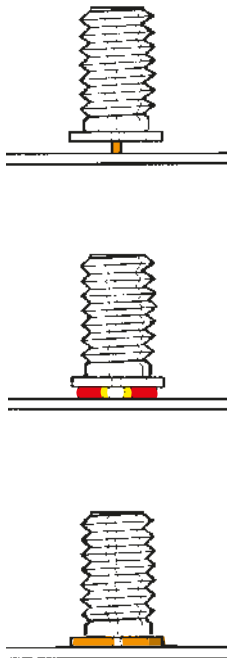

Taylor Studwelding Systems Limited is a specialist in the design, manufacture and supply of Studwelding equipment and studs. Within our range of British built equipment we will have the system to suit your requirements.

AUTOMATIC WELD HEAD AND STUD FEEDING SYSTEM CAPACITOR DISCHARGE STUDWELDING

Designed and built to meet all required standards. The Taylor Studwelding Automatic Systems are CE and UKCA marked.

TEL: +44 (0)1924 452123 | FAX: +44 (0)1924 430059
EMAIL: sales@taylor-studwelding.com | www.taylor-studwelding.com



A TAYLORMADE PRODUCTION WELD HEAD TO WELD UP TO 8MM DIAMETER STUDS

TAYLOR STUDWELDING SYSTEMS LIMITED

Commercial Road, Dewsbury, West Yorkshire, WF13 2BD, England

TEL: +44 (0)1924 452123 | FAX: +44 (0)1924 430059 | EMAIL: sales@taylor-studwelding.com
www.taylor-studwelding.com

TAYLORMADE AUTOMATIC STUDWELDING SYSTEMS



CDM 9 Controller



SIK-2 Weld Head



Universal Stud Feed Unit

CDM 9 CONTROLLER

- Compact, lightweight portable machine.
- Strong, robust construction.
- Rapid welding action reduces weld time.
- Super-fast recharge time improves profitability.
- Easy adjustment of capacitor voltage.
- LED displays allow easy monitoring of functions.
- Quality and reliability from Taylor Studwelding Systems Limited.
- Welds Mild Steel, Stainless Steel, Aluminium and Brass.
- Part number: 99-100-301.
- Dimensions (L x W x H) (mm): 430 x 210 x 270.
- Weight: 17.5kg.

SIK-2 WELD HEAD

- Compact and lightweight.
- Strong robust construction.
- Straight through feeding system.
- Welds M2.5 to M8 studs as standard.
- Other diameters possible.
- Welds from 6 to 35mm as standard.
- Other lengths possible.
- Up to 50 studs / minute possible.
- Suitable for CNC and Robotic applications.
- Part number: 99-100-144.
- Dimensions (L x W x H) (mm): 280 x 85 x 80.
- Weight: 2.65kg.

UNIVERSAL STUD FEED UNIT

- Designed to automatically feed studs to the weld head.
- Easily adjustable for different sizes of studs.
- Operating range – M3 to M8 as standard.
- Other diameters possible.
- Operating stud length – 6mm to 35mm.
- Other lengths possible.
- Speed – up to 40 studs/minute.
- Part number: 99-100-195.
- Dimensions (L x W x H) (mm): 470 x 450 x 340.
- Weight: 35kg.

CABLES

- Full set of interconnecting cables available up to 5 meters long.
- Part number: 99-102-403.

FOR TROUBLE FREE WELDING YOU WILL STILL NEED TO PURCHASE TOP QUALITY WELD STUDS

- We stock and sell a full range of Mild Steel, Stainless Steel, Aluminium Alloy and Brass from M2.5 to M10, with all Capacitor Discharge studs manufactured to European and international standards for automatic welding.
- With over 10,000,000 items held in stock, no order is too complex to fulfil.



TAYLOR STUDWELDING SYSTEMS LIMITED

Commercial Road, Dewsbury, West Yorkshire, WF13 2BD, England

TEL: +44 (0)1924 452123 | FAX: +44 (0)1924 430059 | EMAIL: sales@taylor-studwelding.com

www.taylor-studwelding.com